
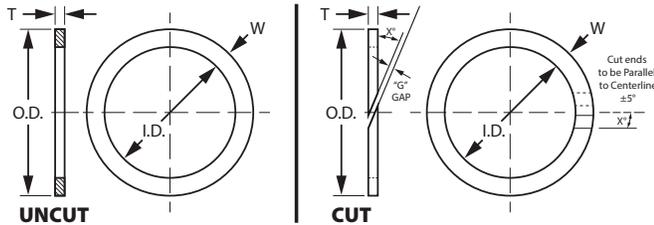


TECHNICAL BULLETIN: PTFE BACK-UP RINGS

PTFE Back-Up Rings are used to prevent the extrusion of Elastomeric O-Rings in a dynamic or static sealing application. Most O-Rings will begin to wear when subjected to increasing temperatures and pressures and will begin to extrude into any gaps next to the O-Ring groove. Modern applications are being designed with higher temperatures and pressure than ever before, thus making the PTFE Back-Up Ring a necessity.

When a PTFE Back-Up ring is used in conjunction with an Elastomeric O-Ring, the Back-Up ring reduces the gap that might be present and prevents O-Ring extrusion, allowing it to operate at higher pressures and temperatures. The G400 (virgin PTFE) material that is used to manufacture the Back-Up Rings can withstand greater temperatures and pressures than most elastomers, therefore it will hold up to any environment that an Elastomeric O-Ring can withstand. Most of our Back-Up Rings can be ordered in either Cut (MS28774), or Solid (MS27595) configurations. For inch sizes refer to AS568D standard dimensions. Custom sizes can be manufactured. Give IPM-TEK a call for all of your, standard or custom, PTFE Back-Up Ring needs.

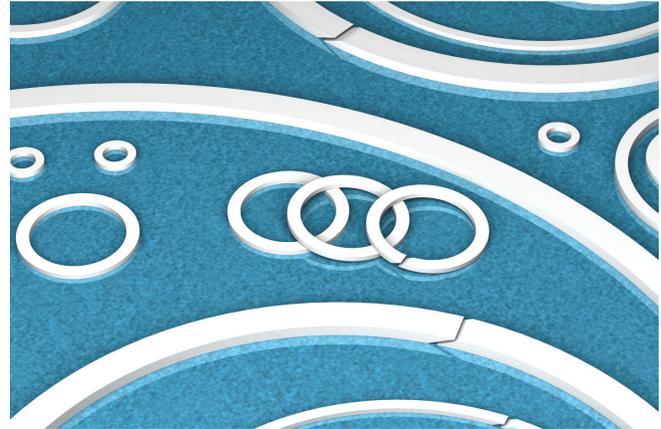

Standard Metric Back-Up Ring Sizes

W	I.D.	T	W	I.D.	T	W	I.D.	T	W	I.D.	T	W	I.D.	T
1.5	3	1.25	2	20	1.25	2.5	90	1.25	3	22.4	1.25	5	75	1.9
1.5	4	1.25	2	21	1.25	2.5	95	1.25	3	24	1.25	5	80	1.9
1.5	5	1.25	2	22	1.25	2.5	100	1.25	3	25	1.25	5	85	1.9
1.5	6	1.25	2.5	25	1.25	2.5	105	1.25	3	25.5	1.25	5	90	1.9
1.5	7	1.25	2.5	30	1.25	2.5	106	1.25	3	26	1.25	5	95	1.9
1.5	8	1.25	2.5	35	1.25	2.5	108	1.25	3	28	1.25	5	100	1.9
1.5	9	1.25	2.5	40	1.25	2.5	110	1.25	3	29	1.25	5	102	1.9
1.5	10	1.25	2.5	45	1.25	2.5	115	1.25	3	29.5	1.25	5	105	1.9
2	10	1.25	2.5	50	1.25	2.5	116	1.25	3	30	1.25	5	110	1.9
2	11	1.25	2.5	52	1.25	2.5	120	1.25	3	31	1.25	5	112	1.9
2	11.2	1.25	2.5	55	1.25	2.5	125	1.25	3	31.5	1.25	5	115	1.9
2	12	1.25	2.5	57	1.25	2.5	126	1.25	3	32	1.25	5	120	1.9
2	12.5	1.25	2.5	58	1.25	2.5	128	1.25	3	34	1.25	5	125	1.9
2	13	1.25	2.5	60	1.25	2.5	130	1.25	3	35	1.25	5	130	1.9
2	14	1.25	2.5	62	1.25	2.5	135	1.25	3	35.5	1.25	5	132	1.9
2	15	1.25	2.5	65	1.25	2.5	136	1.25	3	36	1.25	5	135	1.9
2	16	1.25	2.5	70	1.25	2.5	140	1.25	3	38	1.25	5	140	1.9
2	17	1.25	2.5	75	1.25	2.5	145	1.25	3	39	1.25	5	145	1.9
2	18	1.25	2.5	80	1.25	2.5	146	1.25	3	40	1.25	5	150	1.9
2	19	1.25	2.5	85	1.25	3	22	1.25	3	41	1.25	5	152	1.9
									3	42	1.25	5	155	1.9
									3	43	1.25	5	160	1.9
									3	44	1.25	5	165	1.9
									3	45	1.25	5	170	1.9
									3	46	1.25	5	175	1.9
									3	48	1.25	5	180	1.9
									3	49	1.25	5	185	1.9
									3	50	1.25	5	190	1.9
									5	48	1.9	5	192	1.9
									5	50	1.9	5	195	1.9
									5	52	1.9	5	200	1.9
									5	53	1.9	5	205	1.9
									5	55	1.9	5	210	1.9
									5	56	1.9	5	215	1.9
									5	58	1.9	5	220	1.9
									5	60	1.9	5	225	1.9
									5	62	1.9	5	230	1.9
									5	63	1.9	5	235	1.9
									5	65	1.9	5	240	1.9
									5	67	1.9	5	245	1.9
									5	70	1.9	5	250	1.9
									5	71	1.9	5	255	1.9

All measurements
in millimeters.

www.ipmtek.com

900 E. Whitcomb, Ave.
Madison Heights, MI 48071
Office: 225-928-0114
Fax: 225-218-4272
info@ipmtek.com

IPM TEK
THE AMERICAN PTFE MANUFACTURER